


TL-BA020

2,0T


CAPACITY:	2000 kg
MIN. HEIGHT:	140 mm
MAX. HEIGHT:	320 mm
DIAMETER OF PADS:	190 mm
WORKING PRESSURE:	8 Bar Max.
WORKING TEMPERATURE:	-5 °C - 35 °C
WEIGHT:	10 kg

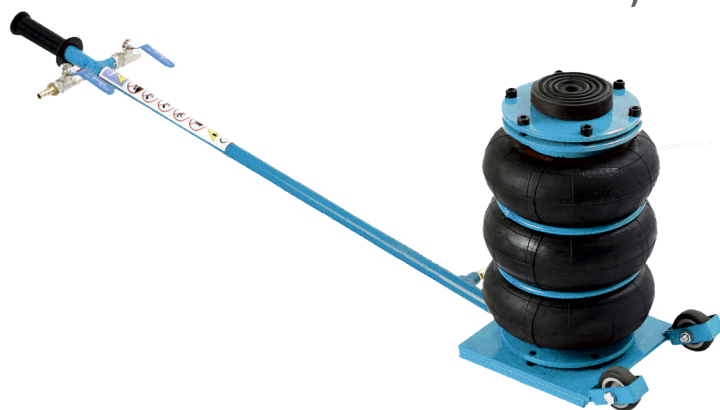

TL-BA030

3,0T

CAPACITY:	3000 kg
MIN. HEIGHT:	140 mm
MAX. HEIGHT:	380 mm
DIAMETER OF PADS:	240 mm
WORKING PRESSURE:	8 Bar Max.
WORKING TEMPERATURE:	-5 °C - 35 °C
WEIGHT:	20 kg

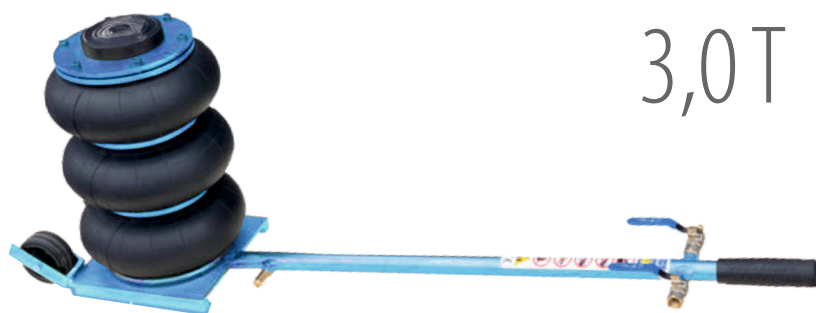

TL-BA045

4,5T

CAPACITY:	4500 kg
MIN. HEIGHT:	140 mm
MAX. HEIGHT:	380 mm
DIAMETER OF PADS:	340 mm
WORKING PRESSURE:	8 Bar Max.
WORKING TEMPERATURE:	-5 °C - 35 °C
WEIGHT:	23 kg



TL-BA080

8,0T

CAPACITY:	8000 kg
MIN. HEIGHT:	140 mm
MAX. HEIGHT:	380 mm
DIAMETER OF PADS:	440 mm
WORKING PRESSURE:	8 Bar Max.
WORKING TEMPERATURE:	-5 °C - 35 °C
WEIGHT:	30 kg

