


PD4000N-SP

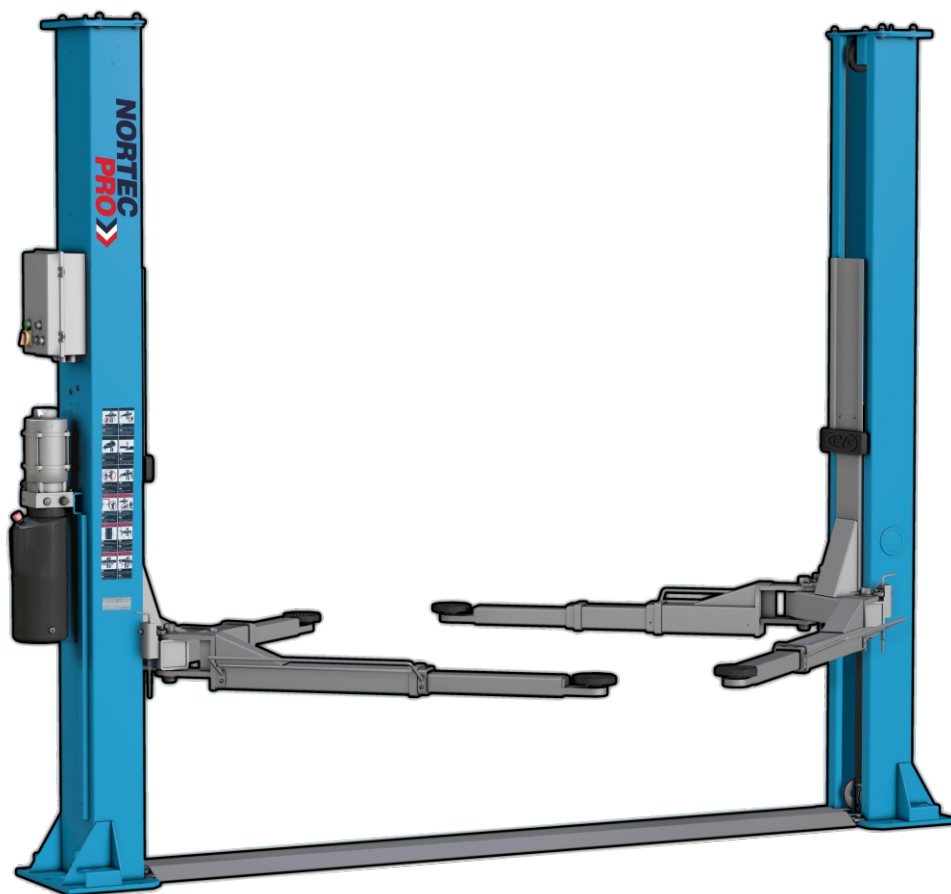


Electrohydraulic lift
Integrated pump control system
Mechanical sync at floor level
Electromagnetic height lock
Automatic arm lock while lifting
Quick drop-in extensions
Ultra universal arms
Rubber pads for car door protection

SPECIFICATIONS:

CAPACITY:	4000 kg
POWER SUPPLY:	400V/50Hz
MOTOR POWER:	2,6 kW
LIFTING HEIGHT:	1900 mm
SPACE BETWEEN COLUMNS:	2580 mm
2-STAGE ARMS:	980-1420 mm
3-STAGE ARMS:	740-1310 mm
CIŚNIENIE OLEJU:	17-19 MPa
NOISE LEVEL:	<70 dB
WEIGHT:	650 kg

DIMENSIONS OF THE LIFT

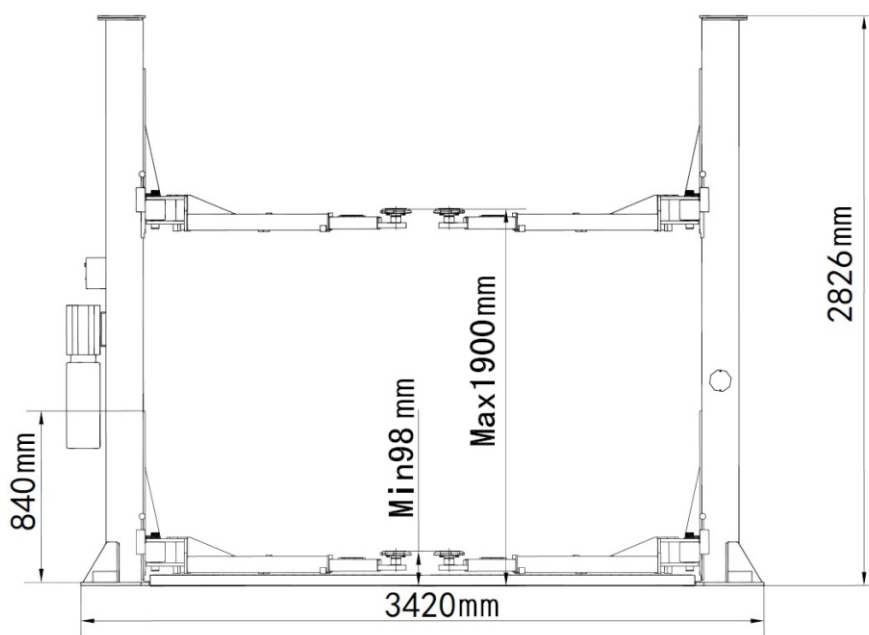


STANDARD EQUIPMENT




Quick drop-in extensions
80 mm

DIMENSIONS OF ARMS

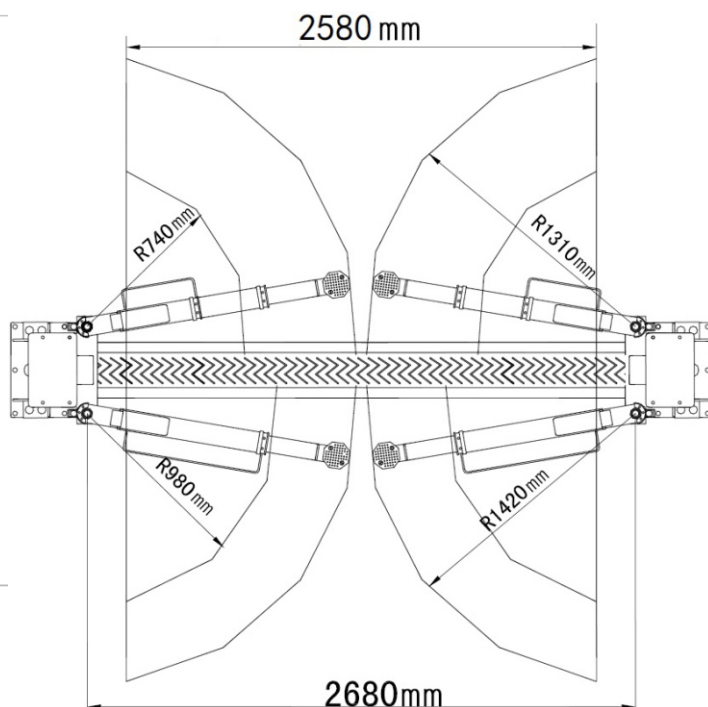

1999-2019 20 years Nortec!

PD4000N-SP

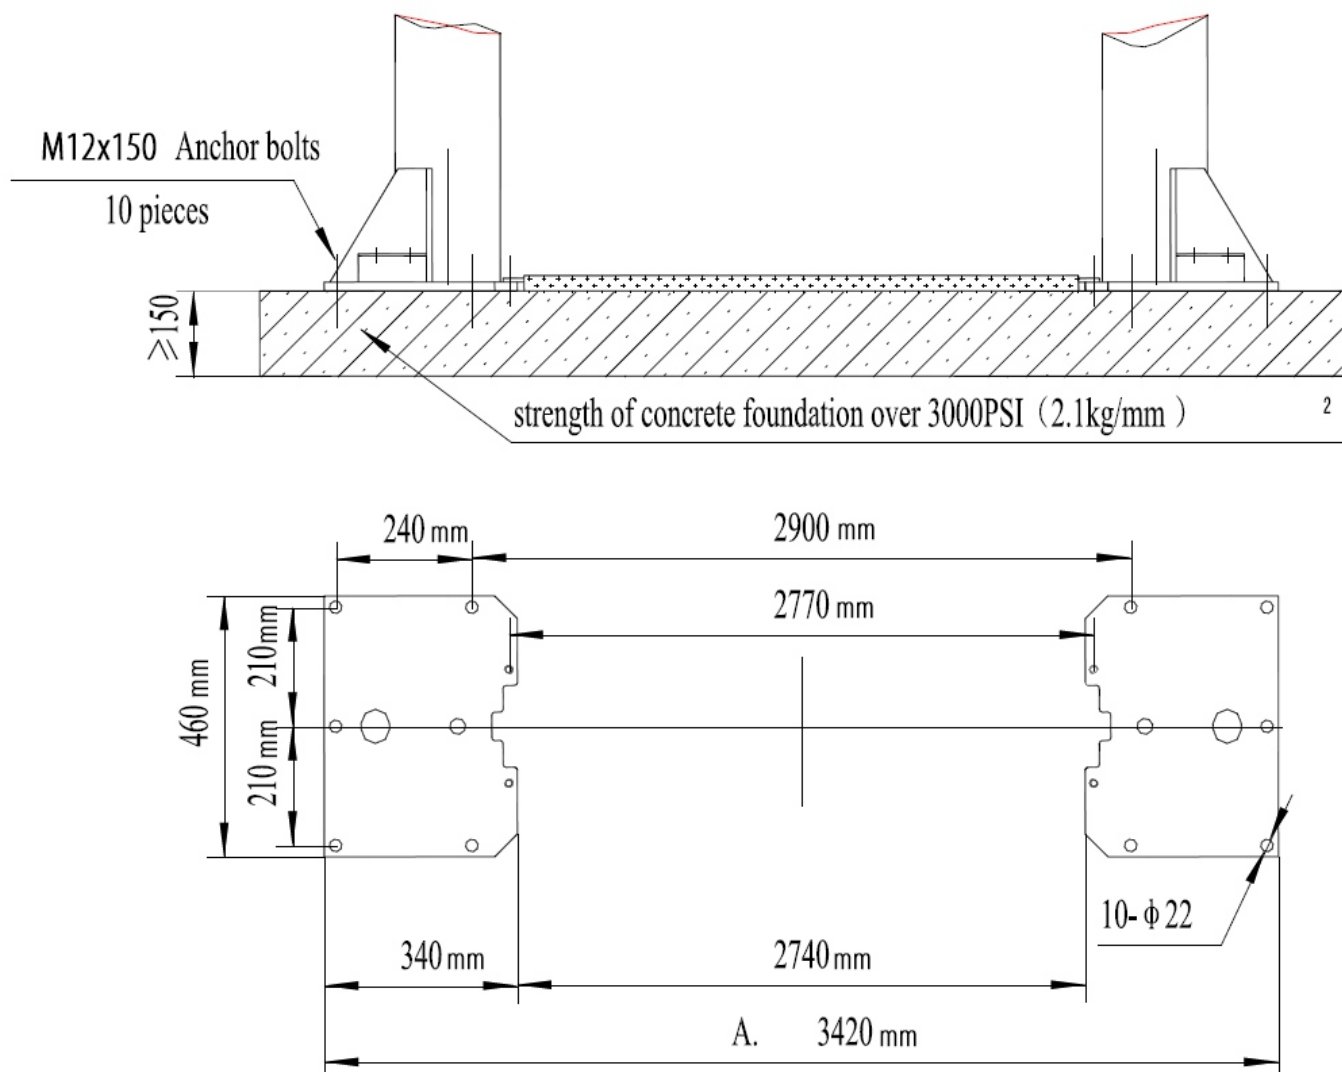

INSTALLATION REQUIREMENTS:

CONCRETE STENGTH:	C20/25, B25
FLOOR THICKNESS UNDER THE LIFT:	min. 150 mm
ZALECANE WYMIARY POSADZKI:	4000 x 1500 mm
ACCEPTABLE FLOOR IMBALANCE:	± 5 mm
FLOOR EXECUTION:	3 weeks before assembly
KOTWY MONTAŻOWE:	Mechanical anchor M12/150 mm, 10 pcs. or Chemical anchor m18/150 mm
HYDRAULIC OIL:	HL32 lub HL46
POWER SUPPLY:	Wire 5x 2,5 mm ²
ELECTRICAL FUSE:	min. 10A przy 400V/50Hz, 3 Phase

ASSEMBLY ALLOWED ONLY IN CLOSED AREAS!

ELECTRO-HYDRAULIC 2 POST LIFT

**NORTEC
PRO»**

