
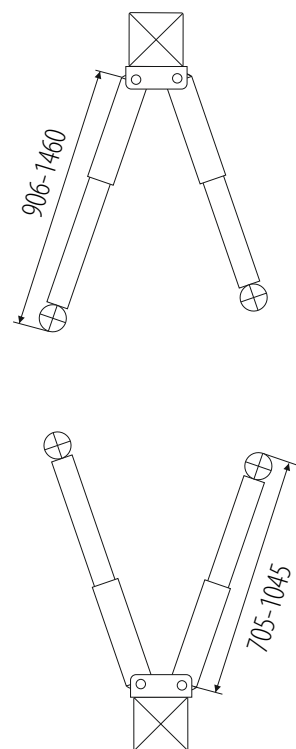


## PD4000SR

**TECHNICAL DATA:**



CAPACITY:	4000 kg
POWER SUPPLY:	230V/50Hz
MOTOR POWER:	2,2 kW
LIFTING HEIGHT:	1800 mm
CLEARANCE:	2560 mm
2-STAGE ARMS	705-1045 mm
2-STAGE ARMS	906-1460 mm
OIL PRESSURE	16 MPa
NOISE LEVEL:	<70 dB
WEIGHT:	560 kg

Electrohydraulic lift ♦ Mechanical synchronization on the floor level ♦ Automatic lever release height lock ♦ 2-piece asymmetrical arms ♦ Automatic arm lock when lifting

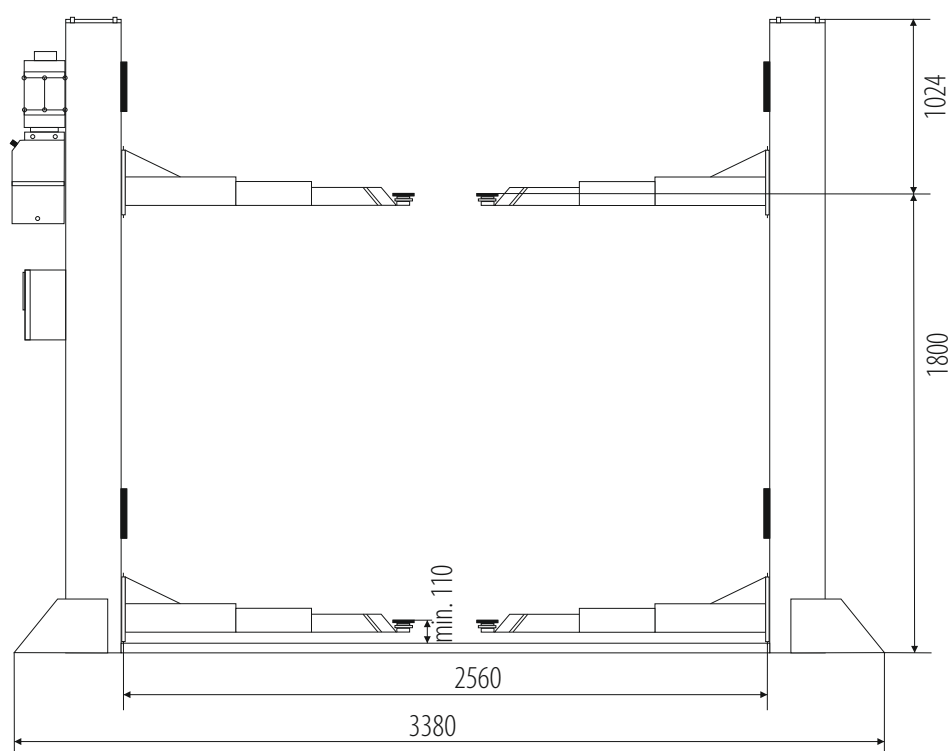

## PD4000SR

Mechanical anchor M12/150 mm

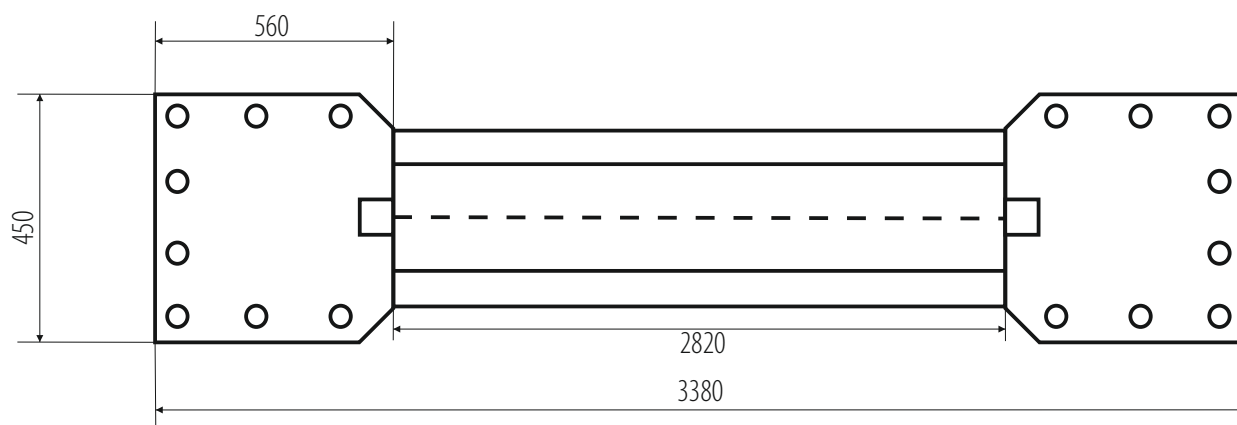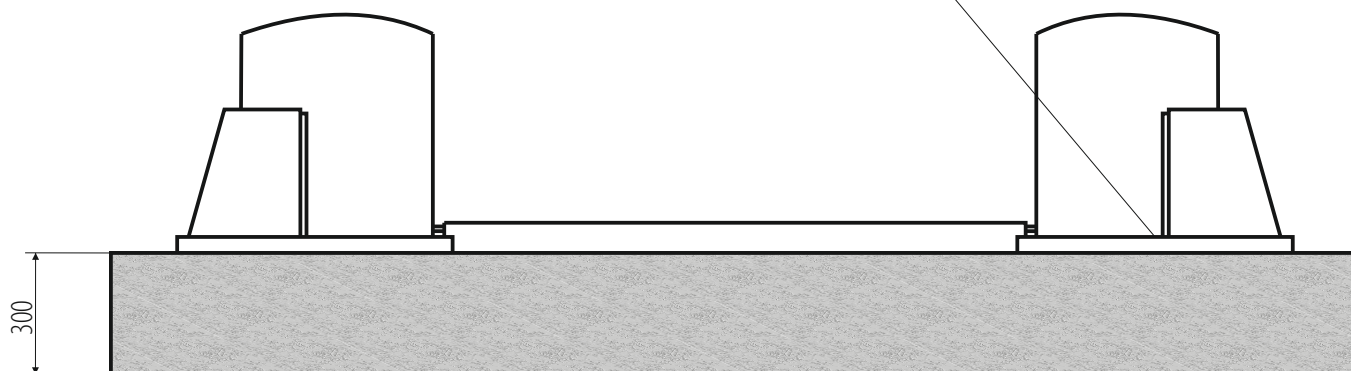

## INSTALATION REQUIERMENTS:



Concrete class: B25 or C20 / 25 with a minimum mounting area: 4000x1500x300mm ♦ Acceptable floor imbalance: +/- 5mm  
 floor execution: 3 weeks before assembly ♦ Anchor bolts: mechanical anchor M12/150 mm 10 pcs or chemical M16/250mm  
 ♦ Hydraulic oil: HL32, 10,0l ♦ Power supply: wire 5x 2,5mm to the place of assembly ♦ Electrical fuse: min. 32A at 230V/50Hz, 1 Phase

Assembly allowed only in closed areas ♦ prohibition of using reinforcement 20 cm from the top thicker than 4mm<sup>2</sup> ♦ assembly for chemical anchors for an additional fee (submit in advance, preferably when setting the date of assembly) ♦ All connections, with particular reference to electrical connections, they must be made by authorized persons ♦ The installation must remain carried out by qualified personnel according to the rules attached in this building plan ♦ In the case of assembly by Nortec or its authorized service center, the lift must be on solid ground.