



PD4000BX




TECHNICAL DATA:

CAPACITY:	4200 kg
POWER SUPPLY:	400V/50Hz
MOTOR POWER:	2,2 kW
LIFTING HEIGHT:	1800 mm
CLEARANCE:	2590 mm
2-STAGE SHORT ARMS:	900-1475 mm
3-STAGE LONG ARMS:	700-1400 mm
OIL PRESSURE:	16 MPa
NOISE LEVEL:	<70 dB
WEIGHT:	650 kg

Electro-hydraulic 2 post lift ♦ Synchronization in the lift base
 ♦ Automatic release of locking device ♦ Automatic arm locking during lifting ♦ Set of door protection

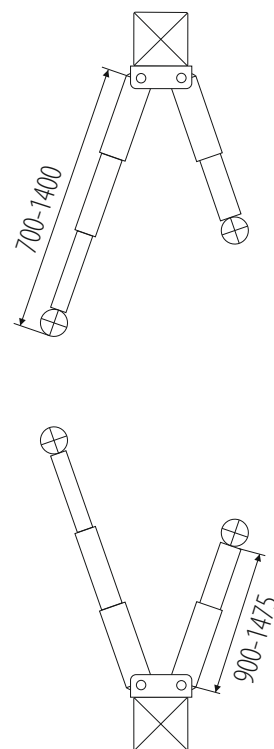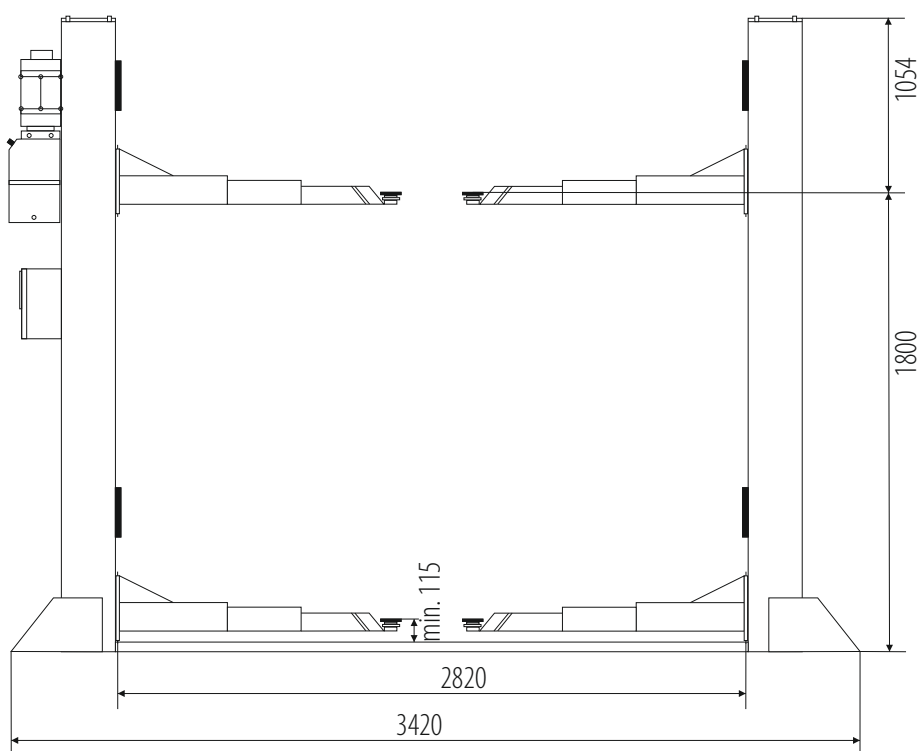

PD4000BX

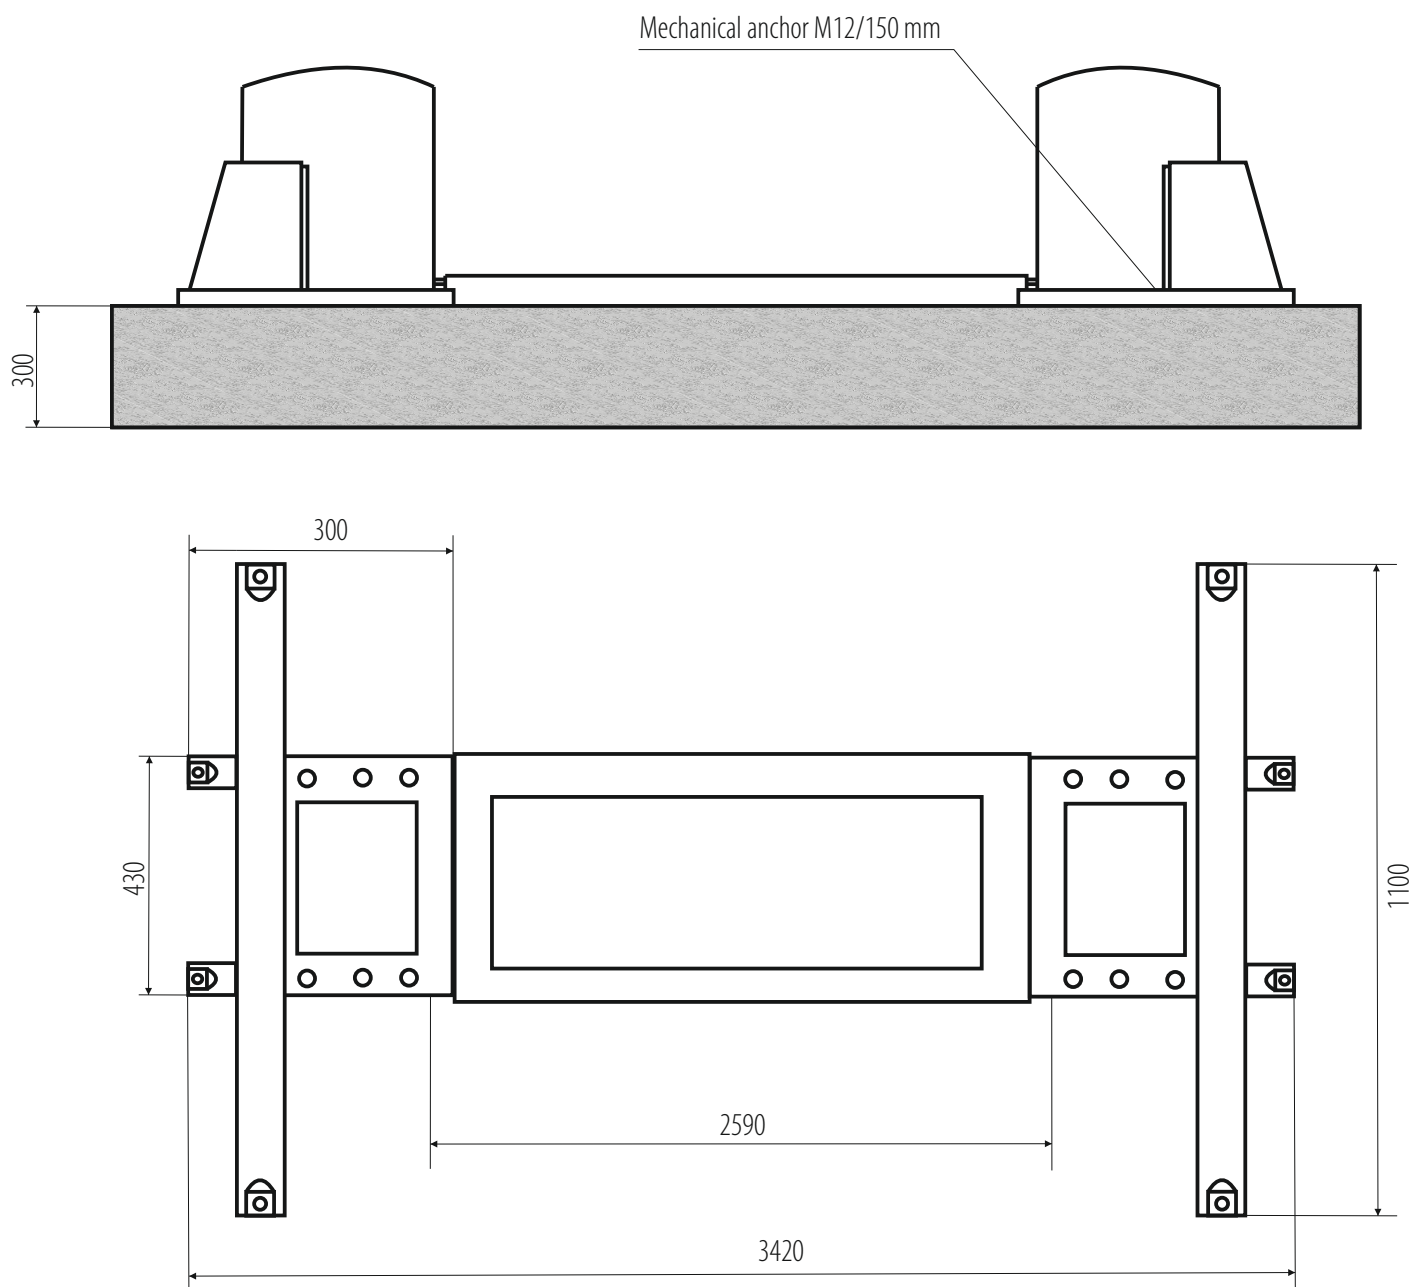

INSTALATION REQUIERMENTS:



Concrete class: B25 or C20 / 25 with a minimum mounting area: 4000x1600x300mm ♦ Acceptable floor imbalance: +/- 5mm
 floor execution: 3 weeks before assembly ♦ Anchor bolts: mechanical anchor M12/150 mm 10 pcs or chemical M16/250mm
 ♦ Hydraulic oil: HL32, 10,0l ♦ Power supply: wire 5x 2,5mm to the place of assembly ♦ Electrical fuse: min. 16A at 400V/50Hz 3 Phase.

Assembly allowed only in closed areas ♦ prohibition of using reinforcement 20 cm from the top thicker than 4mm² ♦ assembly for chemical anchors for an additional fee (submit in advance, preferably when setting the date of assembly) ♦ All connections, with particular reference to electrical connections, they must be made by authorized persons ♦ The installation must remain carried out by qualified personnel according to the rules attached in this building plan ♦ In the case of assembly by Nortec or its authorized service center, the lift must be on solid ground.