





PN3001D

Scan and see more!





CAPACITY:
POWER SUPPLY:
PNEUMATIC SUPPLY:
MOTOR POWER:
LIFTING HEIGHT:
PLATFORM LENGHT:
NOISE LEVEL:
WEIGHT:
SIZE OF THE PACKAGE:


400V/50Hz 6-8 bar 2,2 kW 110-1000 mm 1400-1900 mm <70 dB 550 kg 160x180x65 cm


3000 kg

Electrohydraulic scissor lift with moving possibility • stable construction • mechanical height lock pneumatically released • mechanically synchronized adjustable platforms • rubber pads and moving set in standard equipment

• safety appliances in order to EN1493:2010 • oil HL22 10 liters.

STANDARD EQUIPMENT

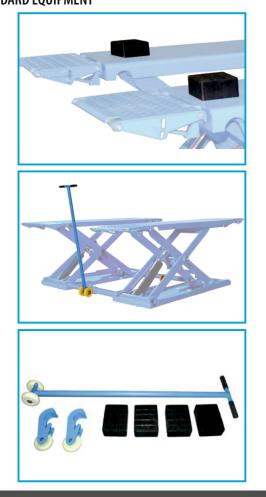

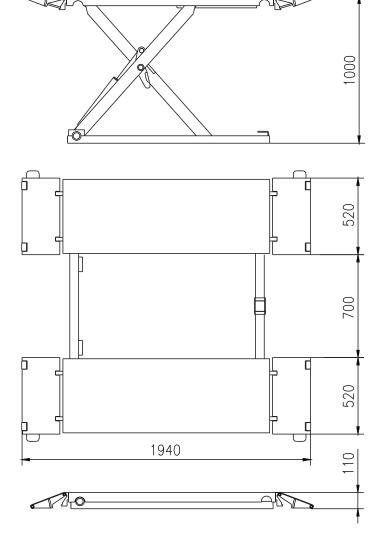

LIFT MOVING KIT RUBBER SPACERS 4 PCS.